


ALL STEEL SCREW TAKE-UPS

MEDIUM DUTY • HEAVY DUTY • EXTRA HEAVY DUTY



DAICON™ all steel screw take-ups are ruggedly constructed from structural steel channel to give years of trouble free service. The screw is made of heavy duty ACME thread which is fully protected and remains in tension regardless of the direction of the load. The saddles are made from rectangular tubing and are adjustable for all sizes of pillow blocks; 2 or 4 bolt hole models available. We can customize to suit your specific needs.

See specifications on reverse side



SIMAR - DAICON INC.


546, Des Forges, Beloeil, Québec, Canada, J3G 4S5

Tel.: (450) 464-9988 Fax : (450) 446-2378 E-mail: dacon@qc.aibn.com

Toll free: 1-800-464-6114

Web site: www.daconv.com

DIMENSIONS

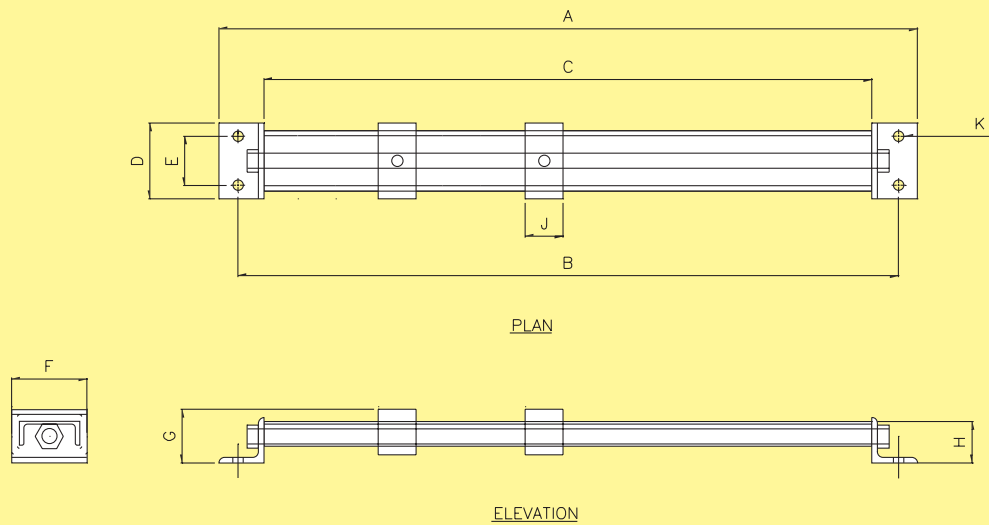

EXTRA HEAVY DUTY

TYPE	T	A	B	C	D	E	F	G	H	J	K
DST	12" EHD	40"	37-1/2"	34"	6-1/2"	4"	7-3/8"	4-13/16"	6C 15,1	4"	13/16" Ø
DST	18" EHD	46"	43-1/2"	40"	6-1/2"	4"	7-3/8"	4-13/16"	6C 15,1	4"	13/16" Ø
DST	24" EHD	52"	49-1/2"	46"	6-1/2"	4"	7-3/8"	4-13/16"	6C 15,1	4"	13/16" Ø
DST	30" EHD	60"	57-1/2"	54"	6-1/2"	4"	7-3/8"	4-13/16"	6C 15,1	4"	13/16" Ø
DST	36" EHD	66"	63-1/2"	60"	6-1/2"	4"	7-3/8"	4-13/16"	6C 15,1	4"	13/16" Ø
DST	48" EHD	78"	75-1/2"	72"	6-1/2"	4"	7-3/8"	4-13/16"	6C 15,1	4"	13/16" Ø

HEAVY DUTY

TYPE	T	A	B	C	D	E	F	G	H	J	K
DST	12" HD	40"	37-1/2"	34"	6-1/2"	4"	7"	3-1/2"	6C 8,2	2-1/2"	13/16" Ø
DST	18" HD	46"	43-1/2"	40"	6-1/2"	4"	7"	3-1/2"	6C 8,2	2-1/2"	13/16" Ø
DST	24" HD	52"	49-1/2"	46"	6-1/2"	4"	7"	3-1/2"	6C 8,2	2-1/2"	13/16" Ø
DST	30" HD	60"	57-1/2"	54"	6-1/2"	4"	7"	3-1/2"	6C 8,2	2-1/2"	13/16" Ø
DST	36" HD	66"	63-1/2"	60"	6-1/2"	4"	7"	3-1/2"	6C 8,2	2-1/2"	13/16" Ø
DST	48" HD	78"	75-1/2"	72"	6-1/2"	4"	7"	3-1/2"	6C 8,2	2-1/2"	13/16" Ø

MEDIUM DUTY

TYPE	T	A	B	C	D	E	F	G	H	J	K
DST	12" MD	34-1/4"	31-3/4"	28-1/4"	5"	3-1/4"	5"	3-1/2"	4C 5,4	2-1/2"	11/16" Ø
DST	18" MD	40-1/4"	37-3/4"	34-1/4"	5"	3-1/4"	5"	3-1/2"	4C 5,4	2-1/2"	11/16" Ø
DST	24" MD	46-1/4"	43-3/4"	40-1/4"	5"	3-1/4"	5"	3-1/2"	4C 5,4	2-1/2"	11/16" Ø
DST	30" MD	52-1/4"	49-3/4"	46-1/4"	5"	3-1/4"	5"	3-1/2"	4C 5,4	2-1/2"	11/16" Ø
DST	36" MD	58-1/4"	55-3/4"	52-1/4"	5"	3-1/4"	5"	3-1/2"	4C 5,4	2-1/2"	11/16" Ø
DST	48" MD	70-1/4"	67-3/4"	64-1/4"	5"	3-1/4"	5"	3-1/2"	4C 5,4	2-1/2"	11/16" Ø